


Data Sheet | Extension Board

XP-SNET-E248

24 Supervised Input & 8 Relay Output Extension Board

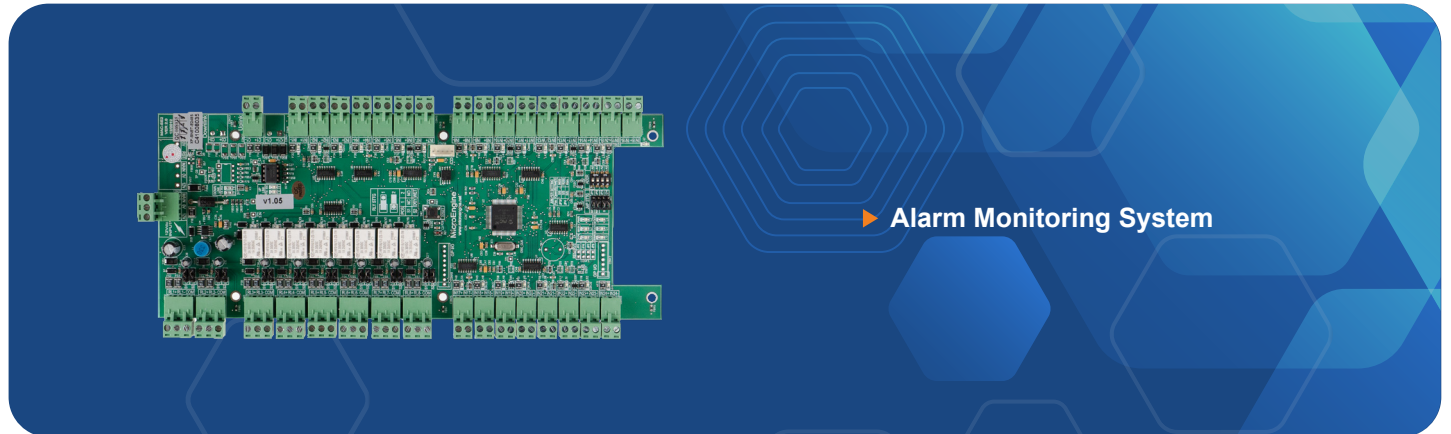

Product Description

MicroEngine XP-SNET-E248 is a 24 supervised input points & 8 relay outputs extension board. It has 8 durable relays with LED indicator for each of the relay. It is designed for Door/Alarm Monitoring System and Panic Button System. It is controlled by a main controller (XP-SNET5) according to the application being used.

Product Features


- **Alarm Monitoring System**
 - Up to 128 inputs and 128 relay outputs per controller
 - Up to 2048 supervised inputs, 1024 relay outputs
 - Alarm Instruction programming
 - Software / hardware arm / disarm
 - Scheduled arm / disarm

Product Specification

Supervised Input	24 Able to detect line being bypassed, cut or triggered
Relay Output	8 Relay Rating : 1A
On Board Surge Suppressor	Yes
Power Requirement	12V @ 2A
Communication to Base Board	RS485
LED indicator	Yes
Operating Temperature	10 °C to 50°C (Degree Celsius)
Dimension	270 mm x 130 mm x 25 mm (Board)

Data Sheet | Extension Board

Product Dimension

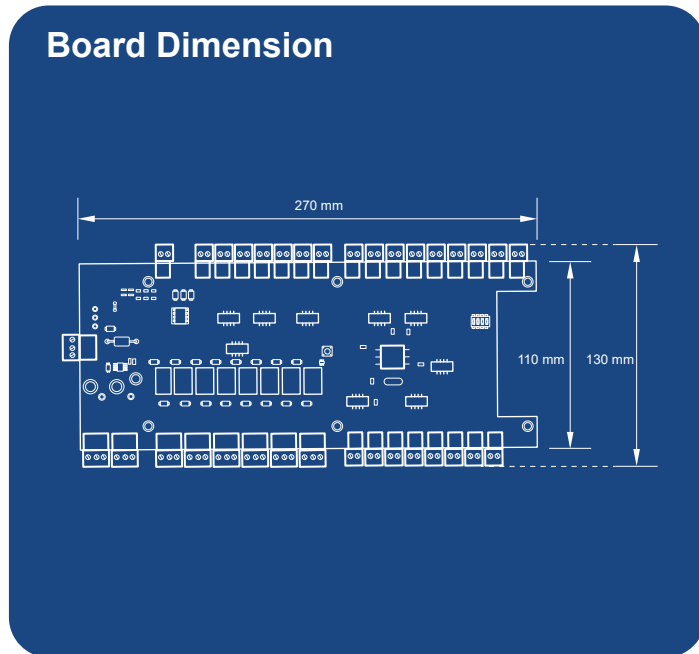

Related Product

- ▶ XP-SNET5
- ▶ XP-QNET
- ▶ XP-SNET/IPC
- ▶ XP-QNET/IPC
- ▶ USB-XPNETSV17PS
- ▶ USB-XPNET HS V2.0 PS
- ▶ MKEY-XPNETSV2.0PS

Ordering Information

XP-SNET5

5 Doors Ethernet Access Controller. 5 RS485 In/Out / 5 Weigand Reader Connection. 8 Relay & 16 Input. 50,000 Users, 100,000 Event Transactions. RS485 Communication & TCP/IP. Power Supply 10A, 12VDC & 12AH Battery. Metal Enclosure. Support Door Access, Lift Access & Alarm Monitoring.

XP-QNET

5 Door Multi-Function IP DESFire QR Network Controller. HENGFU Switching Power Supply Battery Charger. Back Up Battery. Metal Enclosure. Support Door Access, Lift Access & Alarm Monitoring.

XP-SNET/IPC

5 Doors Ethernet Access Controller. Max 10 RS485, 50,000 Users, 100,000 Event Transactions. RS485 Communication & TCP/IP. Power Supply 3A, 12VDC & 7AH Battery. Metal Enclosure. Support Door Access, Lift Access & Alarm Monitoring.

XP-QNET/IPC

5 Door Multi-Function IP DESFire QR Network Controller. 3 Amp Switching Power Supply Battery Charger. 7AH Back Up Battery. Metal Enclosure. Support Door Access, Lift Access & Alarm Monitoring.

USB-XPNETSV17PS

xPortalNet v1.7 High Security Platform Server Edition.

USB-XPNET HS V2.0 PS

xPortalNet HS PS v2.0 Software License Dongle.

MKEY-XPNETSV2.0PS

xPortalNet HS PS v2.0 Software Machine Key.